ALARM-SECURITY CABLE 22AWG, 4 CONDUCTOR STRANDED (7 STRAND) 1000' PULL BOX

PART NUMBER:

293-2153







1	☐ APPROVALS: MARKETING	☐ DATE:	THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO VERTICAL CABLE AND MAY NOT BE DISCLOSED OR TRANSMITTED TO ANY OTHER PARTIES WITHOUT THE EXPRESS WRITTEN PERMISSION OF VERTICAL CABLE. THIS INFORMATION IS PROVIDED FOR THE PURPOSES OF QUOTATION ONLY.
	TECHNICAL		Vortica cahle
	SALES		
	FINAL		

GENERAL INFORMATION ABOUT THIS PRODUCT:

MANUFACTURER:

REFERENCE: 293-2153

DESCRIPTION:

Alarm-Security Cable, 22AWG, 4 Conductor Stranded (7 Strand), 1000', Pull Box, White

ACCESSORIES INCLUDED WITH THIS PRODUCT: NONE

FEATURES AND BENEFITS:


- Ideal for Indoor Remote Control of Security, Intercom, and Sound Systems.
- Can also be used for Powering Limited-Control Circuits or Burglar Alarms
- PVC Outer Jacket
- Available in Pull Box

APPLICATIONS:

- Door Controllers
- Prox Sensors
- Key Pads
- Sound Systems
- Access Control
- Smoke Detectors






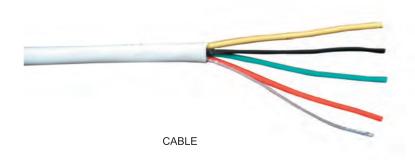

	☐ P/N: 293-2153		☐ PRODUCT: ALARM-SECURITY CABLE, 22AWG, 4 CONDUCTOR
PG. 2	□ AUTHOR:		
	☐ DATE: 04/03/07	☐ REV: 01	Vertical cable

TECHNICAL INFORMATION ABOUT THIS PRODUCT:					
MANUFACTURER:					
REF	ERENCE: 293-2153				
	SCRIPTION: m-Security Cable, 22	AWG, 4 Conductor	Stran	ided (7 S	Strand), 1000', Pull Box, White
			30	ided BC	
Diameter (±0.005mm) 7/0.2 Insulation PVC			7/0.25	54	
Min. Point Thickness (mm) 0.150 Outer Diameter (±0.05mm) 1.10			0.150		
Average Thickness (mm) 0.40 Min. Point Thickness (mm) 0.36 Outer Diameter (±0.10mm) 3.50 Rip Cord Yes		PVC 0.40 0.36 3.50 Yes			
Color White Color of Wire Insulation 1. Red 2. Black 3. Yellov					
Med	4. chanical Characteris Test Object Test Material	tics	Greer		Jacket PVC
Before Tensile Strength (Mpa) >=10 Aging Elongation (%) >=100 Aging Condition (°Cxhrs) 80x168 After Tensile Strength (Mpa) >=80% of unaged Aging Elongation (%) >=75% of unaged Marking VERTICAL CABLE E312655 UL (UL) CMR/CL2R 75C 22AWG 4C STRANDED ALARM/STATION WIRE CABLE (VID:C1) XXXFT SEQUENTIAL FOOT MARKERS ON JACKET					
PG.	□ P/N: 293-2153			□ PROD	DUCT: ALARM-SECURITY CABLE, 22AWG, 4 CONDUCTOR
	☐ AUTHOR:				
	☐ DATE: 04/03/07	☐ REV: 01			Vertical cable

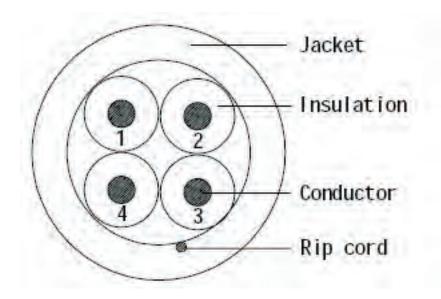

LABEL FOR PRODUCTION DATE CONTROL:

THIS UPC LABEL IS PLACED ON EACH 1 UNIT SHIPMENT CARTON.

LABEL: UPC CODE



IMPORTANT NOTE: --

UL FILE NUMBER: ETL FILE NUMBER: --

PG.	☐ P/N: 293-2153		☐ PRODUCT: ALARM-SECURITY CABLE, 22AWG, 4 CONDUCTOR
	☐ AUTHOR:		
	□ DATE: 04/03/07	☐ REV: 01	vertical cable

PRODUCT PACKAGING DIMENSIONS: PULL BOX PACKAGING: **Tomord lying sent of the sent of the

PG. 5	☐ P/N: 293-2153		☐ PRODUCT: ALARM-SECURITY CABLE, 22AWG, 4 CONDUCTOR
	☐ AUTHOR:		Vertical cable
	☐ DATE: 04/03/07	☐ REV: 01	ATTAIC SHIE

IMPORTANT INFORMATION

HIII CABIA

AWG/ 2C: 4C
Type DOM DOMP DOMP DOMX
Candidator Dischall Stränded
OTY-100ST132549
UNITO E2000000

(B) : (B)

Security Cable

PREMIUM CABLE

15year Limited Warranty

Security Cable

PREMIUM CABLE

SHIPMENT CARTON: SHIPMENT BOX DIMENSION: XX inches XX inches XX inches SHIPMENT CARTONS PLACED IN A PALLET (ONE PALLET FITS XX CARTONS): XX inches XX inches XX inches XX inches XX inches XX inches 3 2 XX inches XX inches 1 - XX inches ☐ P/N: 293-2153 ☐ PRODUCT: ALARM-SECURITY CABLE, 22AWG, 4 CONDUCTOR PG. ☐ AUTHOR: 6

☐ DATE: 04/03/07

☐ REV: 01

Galcable