




25AG1

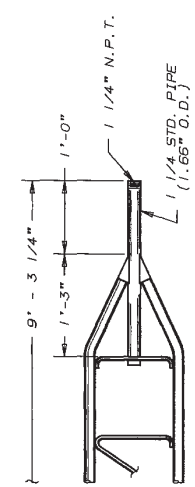


25AG2

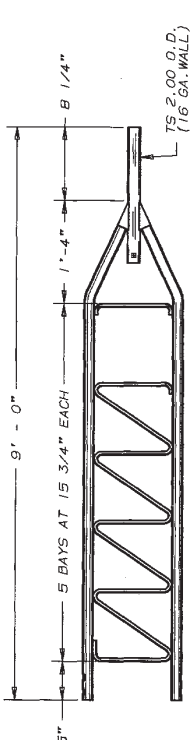


25AG3

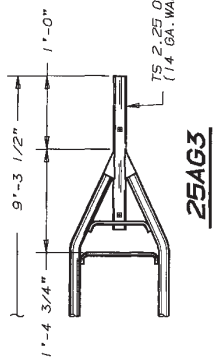


25AG4




25AG5




25AG6



TYPICAL PLAN VIEW
(FOR ALL SECTIONS EXCEPT 25AG4)



SAE GRADE 5 BOLT ASSY'S REQUIRED
(3) 1/4" DIA. X 1 1/2" LG. (NF BOLTS)
(3) 5/16" DIA. X 1 1/2" LG. (NF BOLTS)

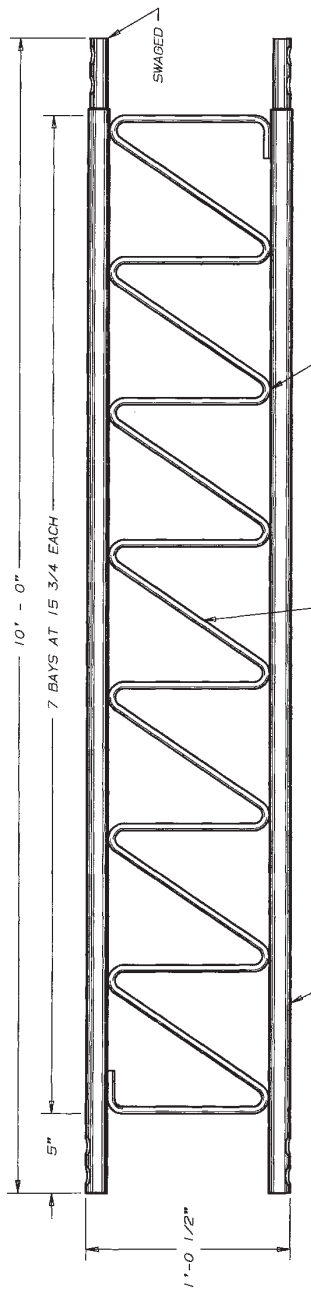

P/N 25G SECTION

SEC. >>	25G TOWER SECTION PROPERTIES	BRACES	SECTION
SIZE	TS 1.25 O.D. (16 GA. WALL)	BAR 5/16 DIA.	N/A
Fy	50.0	36.0	N/A
A	0.2420	0.0770	0.726
S	0.0682	0.0030	2.15
I	0.0426	0.00047	15.3
r	0.4196	0.0781	4.59
L	15.7500	18.7	VARIES
K	1.0	0.70	1.0
KL/r	37.5	167.6	VARIES
C	8.43	0.55	N/A
T	N/A	N/A	N/A
M	0.82	0.261	6.72
Ws	26.0	14.0	40.0

NOMENCLATURE

- A = CROSS SECTIONAL AREA (SQUARE INCHES)
- C = MOMENT OF INERTIA ABOUT CENTROIDAL AXIS (INCHES⁴)
- I = MOMENT OF INERTIA ABOUT CENTROIDAL AXIS (INCHES⁴)
- Fy = MINIMUM YIELD STRENGTH (KSI)
- K = EFFECTIVE LENGTH FACTOR (DIMENSIONLESS)
- L = UNBRACED LENGTH (INCHES)
- M = MOMENT CAPACITY WITH 1/3 INCREASE IN ALLOWABLE NOT APPLICABLE (KIPS)
- N/A = NOT APPLICABLE
- S = ELASTIC SECTION MODULUS (INCHES³)
- T = TENSION CAPACITY WITH 1/3 INCREASE IN ALLOWABLE (KIPS)
- r = RADIUS OF GYRATION (INCHES)
- W = WEIGHT PER FOOT (POUNDS)
- Ws = WEIGHT PER SECTION (POUNDS)

NOTE: CAPACITIES SHOWN ARE BASED ON ANSI/EIA-222-E-1991.

No.	Revision Description	Date	Rev. By	Rev. By	Rev. By	Rev. By
69	REV'D EIA-222-D-1986 TO EIA-222-E-1991	2/16/99	WDL	WDL	WDL	WDL
68	REDRAWN AND REVISED SPEC.	2/16/99	WDL	WDL	WDL	WDL
67	REDRAWN AND REVISED SPEC.	2/16/98	WDL	WDL	WDL	WDL

Date: 2/25/99 Rev. By: WDL

THIS DRAWING IS THE PROPERTY OF ROHN. IT IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, WITHOUT OUR WRITTEN CONSENT.

RoHN

25G SECTION ASSEMBLY

App. Eng.: WDL 2/24/99
App. Sales: AE 2/25/99

DRAWING NO.: C630625 R9